
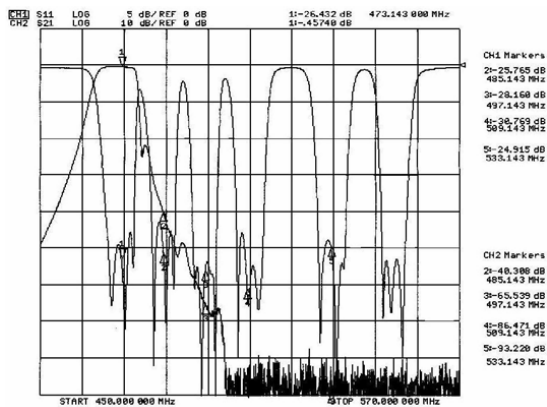


## Channel Combiner & Divider

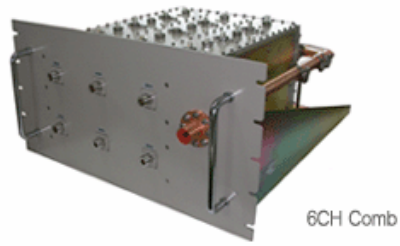

Item	Specifications		
	2CH	3CH, 4CH	5CH ~ 8CH
Insertion Loss (Max.)	-	-	-
Fc	0.3dB	0.5dB	0.5dB
Fc ± 2.79MHz	0.5dB	0.7dB	0.9dB
VSWR (Max.)	1.2 : 1	1.2 : 1	1.3 : 1
Isolation (Min.)	25dB		
Group Delay (Max.)	300ns		
In/Out Connector	N – J or WX – 20D		
Operating Temp.	-10 ~ +45		