


7.1~8.9GHz BPF



Item		Specifications
Frequency Range		7.1 ~ 8.9GHz
Insertion Loss (Max.)		1.5dB
Ripple (Max.)		1.0dB
Return Loss (Min.)		11.0dB
Attenuation	20dB Min.	DC ~ 6.4GHz
	20dB Min.	9.7 ~ 12GHz
Group Delay (Max.)		1 ns
IN/OUT Port		Drop IN
Weight (Max.)		10 g

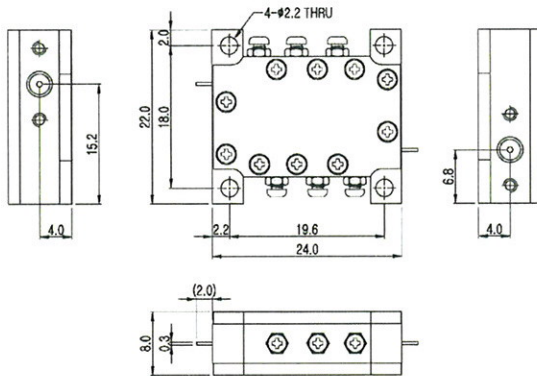