

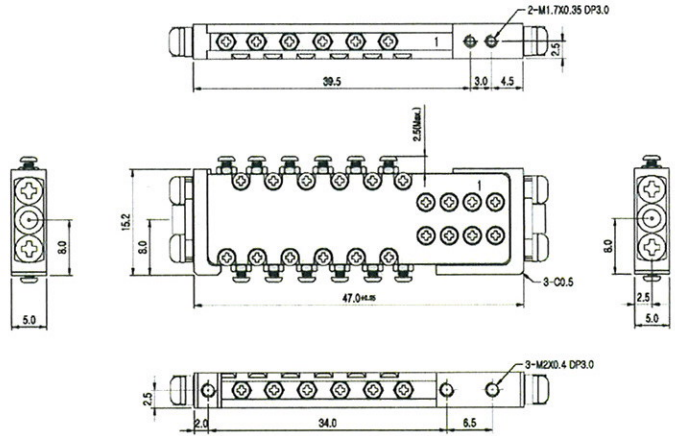


6.0~12.4GHz Filter Bank

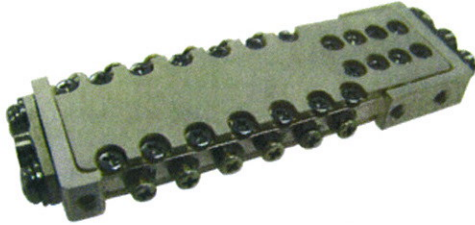

Item	Specifications				
	BPF1	BPF2	BPF3	BPF4	
Frequency Range	6.0~7.6GHz	6.7~9.2GHz	8.3~10.8GHz	9.9~12.4GHz	
Insertion Loss (Max.)	2.5dB				
Ripple (Max.)	1.0dB				
Return Loss (Min.)	11dB				
Attenuation	55dBc Min.	FI-350MHz	FI-550MHz	FI-550MHz	FI-550MHz
	55dBc Min.	Fh+500MHz	Fh+800MHz	Fh+750MHz	Fh+750MHz
	30dBc Min.	8.1~20GHz	10~20GHz	11.55~20GHz	13.15~20GHz
IN/OUT Port	GPO Conn.				
Weight (Max.)	15 g				

[BPF1]

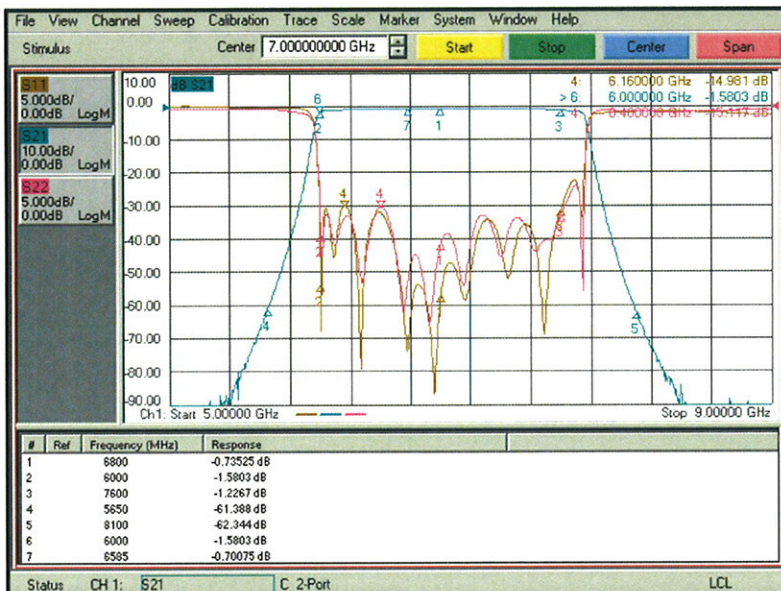

IROM Tech.Inc

102-1006, Digital Empire2, Sin-Dong, Yeongtong-Gu,
Suwon-Si, KyungKi-Do, South Korea

tel : 82-31-695-7095
fax : 82-31-695-7096
e-mail : irom@e-irom.com
web : www.e-irom.com