


2~18GHz Directional Coupler

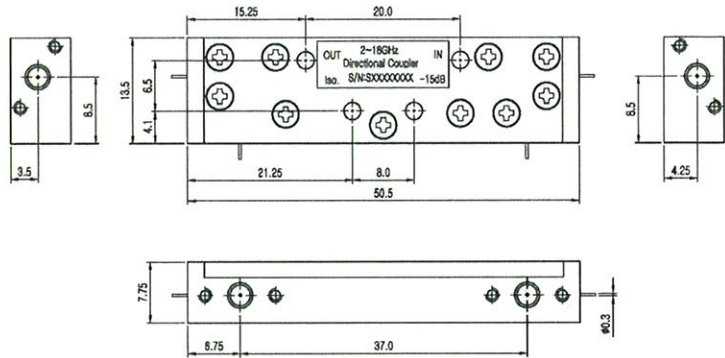

Item	Specifications
	2~18GHz Directional Coupler
Frequency Range	2 ~ 18 GHz
Insertion Loss (Max.)	1.8 dB
Return Loss (Min.)	Typical 14.0 dB
	Max 10.9 dB
Coupling (Max.)	15 ± 0.8 dB
Band Ripple (Max.)	0.8 dB p-p (4GHz Step.)
Frequency Sensitivity (Max.)	± 0.4 dB (40MHz Step.)
Isolation (Min.)	20.0 dB
CW Input Power	2W
Operating Temperature	-45℃ ~ +85℃
Weight	10.3 g
Package Type	Drop IN

[Insertion Loss]

[Coupling]

