



60MHz LC BPF

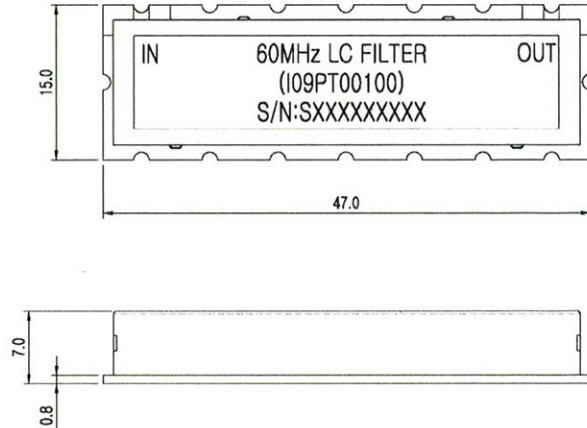

| Item | Specifications |
|--------------------------|-------------------|
| | 60MHz LC BPF |
| Frequency Range | 56 ~ 64 MHz |
| Insertion Loss (Max.) | 6.5 dB (@3dB BW) |
| Return Loss (Min.) | 14.0 dB |
| 3dB Bandwidth (Max.) | 9 ~ 11 MHz |
| Attenuation (Min.) | 40 dBc (Fc±10MHz) |
| Operating Temperature | -40℃ ~ +85℃ |
| Dimension (Max.) | 47.0×15.0×7.5 |
| Input /Output Connectors | SMD |

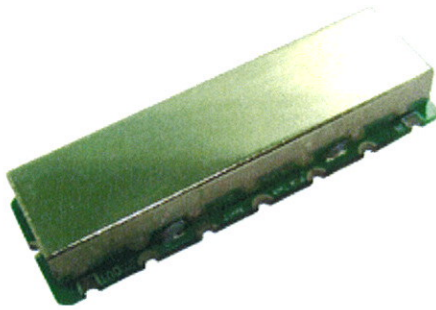