

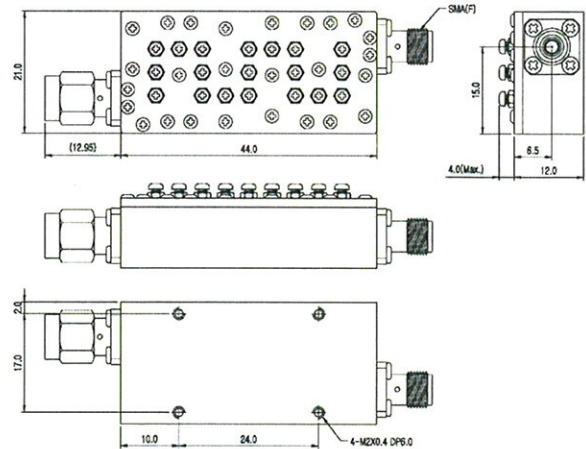


9.5GHz BPF

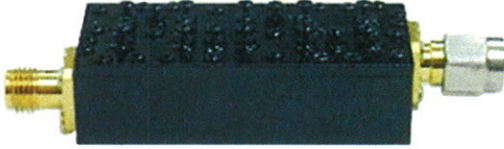

Item		Specifications
Frequency Range		9 ~ 10GHz (Fc:9.5GHz)
Insertion Loss (Max.)		1.0dB
Ripple (Max.)		0.6dB
Return Loss (Min.)		18dB
Attenuation (Min.)	7.785GHz ~ 8.785GHz	30dB
2 nd harmonic Rejection (Min.)		30dB @ 5.4GHz~6.2GHz
In/Out Port		In : SMA(M), OUT:SMA(F)
Input Power		Peak 5KW (impulse duty cycle:10%),
Size (W x D x H) (mm)		44.0 x 21.0 x 15.0 (± 1.0)
Temperature Range		-40℃ ~ +85℃

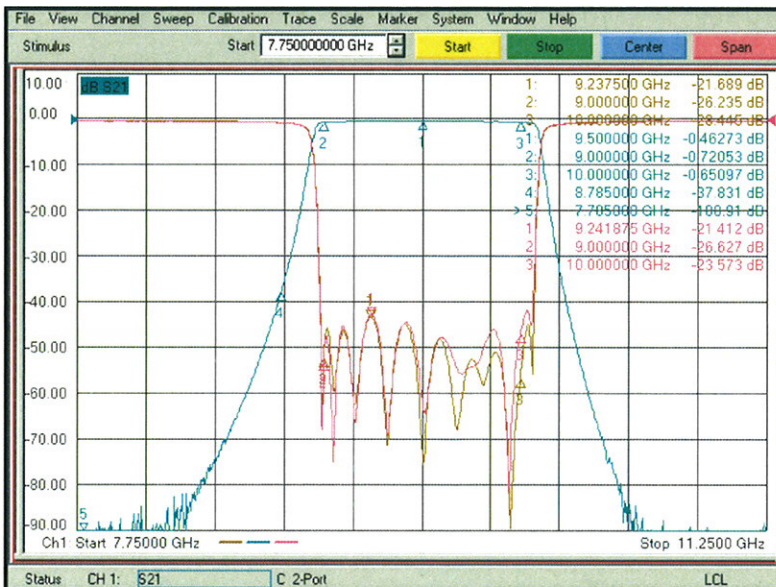

IROM Tech.Inc

102-1006, Digital Empire2, Sin-Dong, Yeongtong-Gu,
Suwon-Si, KyungKi-Do, South Korea

tel : 82-31-695-7095
fax : 82-31-695-7096
e-mail : irom@e-irom.com
web : www.e-irom.com